

4596

Europrofile Operation Paddle Handle



BS EN 179:1998+A1: 2001 Classification Code 37601342B



ASSA ABLOY


Function

Designed for simple push or pull operation for use with the 4750 Series Deadlatch. Dogging comes as standard on push versions.

The push version of the 4596, when used on the 4750 Series Deadlatch and used in conjunction with the 8460 Ramp Jaw Strikes or the 7108 and 7128 Electric Strikes, conforms to BS EN 179: 1998+A1: 2001 EC Certificate of Conformity number 1121-CPD-AB0011.

Specifications


Escutcheon:	105mm x 34mm x 58.7mm (width of base flange). Zinc Alloy, Black finish.
Paddle:	85mm x 125mm. Maximum projection off face of door: 74.24mm. Extruded Aluminium, available in Satin Anodised, Dark Bronze, Black.
Spindle:	6.35mm (1/4") on the diamond, heat treated. Standard spindle lengths to suit 44.45mm (1 3/4") door thickness. Cam on end of spindle.
Operation:	Four modes: Push to Left, Push to Right, Pull to Left and Pull to Right.

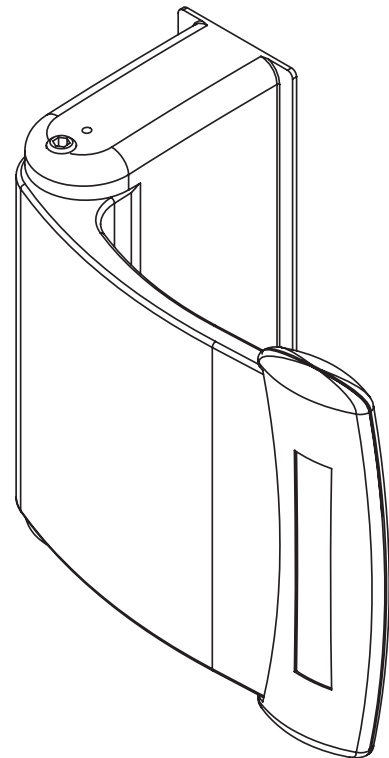

Standards

In accordance with **BS EN 179: 1998+A1: 2001** this product is designed to be used in emergency situations where people are familiar with the emergency exit and its hardware and therefore a panic situation is unlikely to develop. Where panic situations are foreseen, reference should be made to the Adams Rite 900 Series panic exit device range.

Dimensions

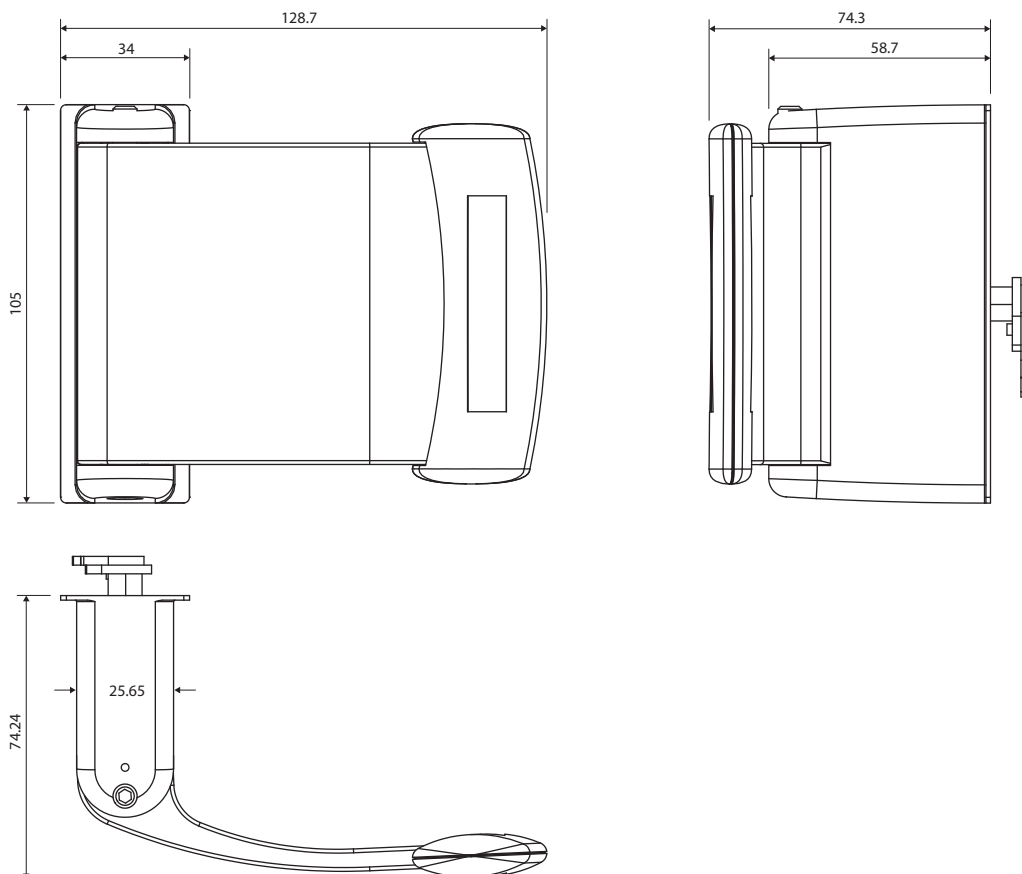

Shown at rest. Paddle travel: 50.8mm.

Ordering Codes

4596-01-01-628	Pull To Left Euro Paddle Handle SAA Finish (for 44mm doors)
4596-03-01-628	Pull To Right Euro Paddle Handle SAA Finish (for 44mm doors)
4596-02-01-628	Push To Left Euro Paddle Handle SAA Finish (for 44mm doors)
4596-04-01-628	Push To Right Euro Paddle Handle SAA Finish (for 44mm doors)

Note: 628 denotes Satin Anodised Finish - substitute 628 with 313 for Bronze, 335 for Black.

Related Hardware

4750 Deadlatch (p18) ~ 8460 Ramp Jaw Strike (p52)